

### 一、适用范围 APPLICATION

CJX2系列交流接触器适用于交流50Hz或60Hz，电压至660V，电流至95A的电路中，供远距离接通与分断电路及频繁起动，控制交流电动机，接触器还可与辅助触头组，空气延时头、机械联锁机构等部件，组成延时接触器、可逆接触器、星三角起动器，并且可以和热继电器直接插接安装组成电磁起动器。




CJX2 ( LC1-D )

CJX2 series AC contactors is applicable in the circuit of AC 50Hz or 60Hz, voltage up to 660V, current up to 95A, which is used for long distance making and breaking the circuit, frequently start and control the AC motor. It can be formed into time-delay contactors, reversible contactors and star-delta starter with various accessories, such as auxiliary contact blocks, air time-delay auxiliary contact blocks, mechanical interlocking mechanism, and so on; it can also be equipped with thermal relay to form electromagnetic starter easily.

### 二、型号及其含义 TYPE AND MEANING




CJX2 ( LC1-D )

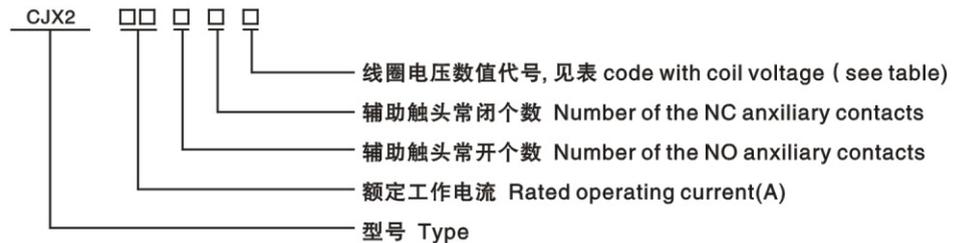

线圈电压(V) Coil voltage	24	32	48	110	127	220	240	380	415	440	480	600	660
50Hz	B5	C5	E5	F5	G5	M5	U5	Q5	N5	R5	T5	S5	Y5
60Hz	B6	C6	E6	F6	G6	M6	U6	Q6	N6	R6	T6	S6	Y6
50/60Hz	B7	C7	E7	F7	G7	M7	U7	Q7	N7	R7	T7	S7	Y7

### 三、主要技术参数 SPECIFICATIONS



CJX2 ( LC1-D )

型号 Type	CJX2-09 (LC1-D09)	CJX2-12 (LC1-D12)	CJX2-18 (LC1-D18)	CJX2-25 (LC1-D25)	CJX2-32 (LC1-D32)	CJX2-40 (LC1-D40)	CJX2-50 (LC1-D50)	CJX2-65 (LC1-D65)	CJX2-80 (LC1-D80)	CJX2-95 (LC1-D95)	
额定绝缘电压(V) Rated insulatio voltage	660	660	660	660	660	660	660	660	660	660	
约定发热电流(A) Conventional therma current	25	25	32	40	50	60	80	80	125	125	
额定工作电流380V AC3 Rated operational current	9	12	16	25	32	40	50	65	80	95	
控制功率 (kw) Controlled power(kw)	220V	2.2	3	4	5.5	7.5	11	15	18.5	22	25
	380V	4	5.5	7.5	11	15	18.5	22	30	37	45
	415V	4	5.5	9	11	15	22	25	37	45	45
	440V	4	5.5	9	11	15	22	30	37	45	45
	660V	5.5	7.5	9	15	18.5	30	33	37	45	45
备注 Note	安装方式:1)两个钉安装 2)35mm导轨安装 The installation of the relays can use two screws and also use the 35mm installation rail					1)3个螺钉安装 2)75mm或35mm导轨安装 The installation of the relays can use three screws and also use the 75mm or 35mm installation rail					



CJX2 ( LC1-D )

注: 3P: 三对常开主触头, NO: 一对常开辅助触头, NC: 一对常闭辅助触头

Note: 3P: Three No main contacts.No:one No auxiliary conacts,NC:One NC auxiliary contacts