


BK 系列控制变压器

适用范围 Applicable

BK 系列控制变压器，适用于变流 50–60Hz，电压至 660 的电路中，作为机床和各种机械设备一般电器的控制电源和局部照明及指示灯的电源之用。

额定容量及外形和安装尺寸图表 Rated Power, Size

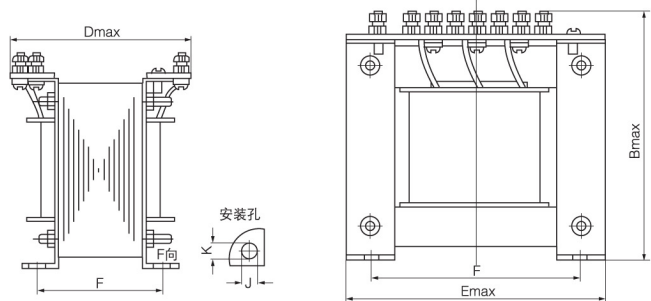

技术参数 Technical Charactrrisitos

型号	安装尺寸		安装孔	外型尺寸		
	A	C		Bmax	Dmax	Emax
BK–25	63.5 ± 0.7	50.8 ± 1.5	5 × 7	76.5	72	85
BK–50	73 ± 0.7	56 ± 1.5	6 × 10	88	84	97
BK–100	82 ± 0.7	64 ± 1.5	6 × 10	110	110	110
BK–150	86 ± 0.7	72 ± 1.5	7 × 9	116	110	130
BK–200	112 ± 0.7	80 ± 1.5	7 × 9	116	108	130
BK–250	112 ± 0.7	88 ± 1.5	7 × 9	116	126	130
BK–300	112 ± 0.7	87 ± 1.5	7 × 9	145	120	158
BK–400	134 ± 0.7	97 ± 1.5	7 × 9	145	130	158
BK–500	134 ± 0.7	105 ± 1.5	7 × 9	145	140	158
BK–1000	134 ± 0.7	128 ± 1.5	8 × 10	202	198	202
BK–1500	134 ± 0.7	158 ± 2	8 × 10	202	205	202
BK–2000	134 ± 0.7	188 ± 2	8 × 10	202	228	202
BK–2500	134 ± 0.7	223 ± 2	8 × 10	202	263	202
BK–3000	134 ± 0.7	223 ± 2	8 × 10	202	263	202
BK–4000	240 ± 1	130 ± 2	8 × 12	260	190	360
BK–5000	240 ± 1	140 ± 2	8 × 12	260	200	360